





GST Biostar technical data

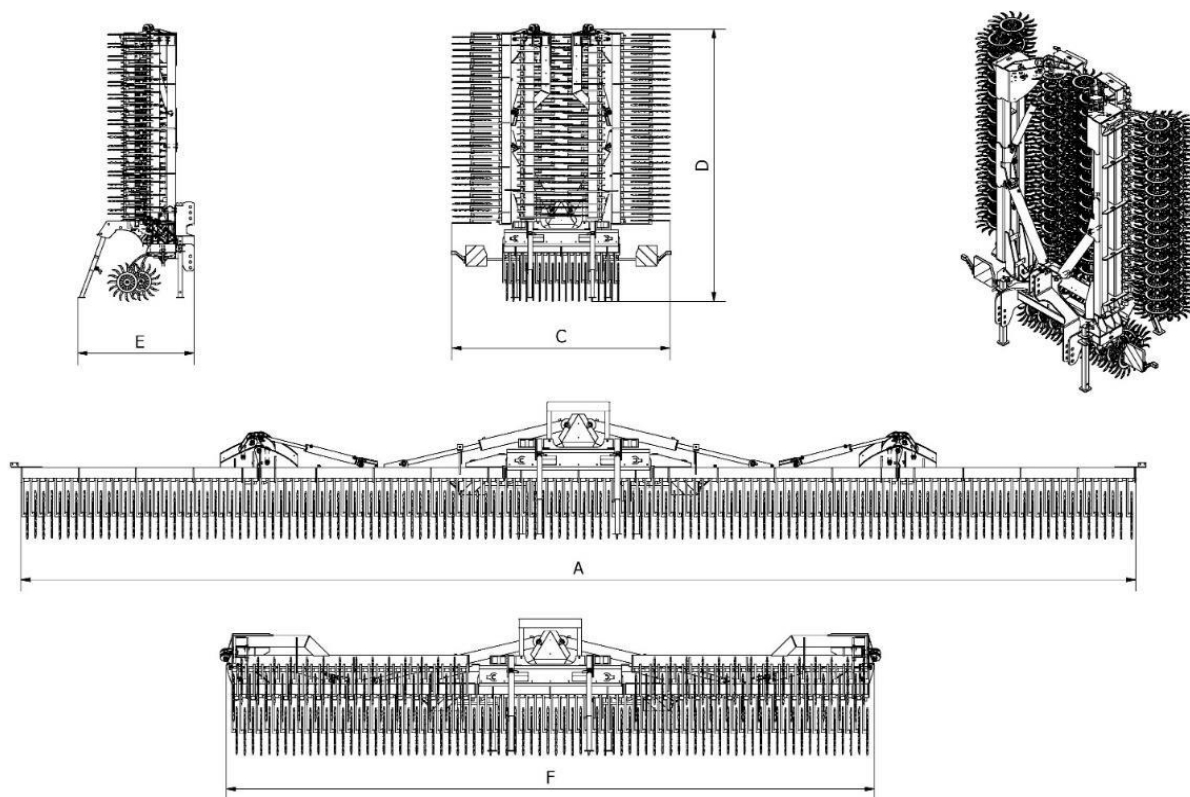

Model	Working width (A)	Transport dimensions			Parking width (F)	Weight	Hitch category	Transport light location
		width (C)	height (D)	length (E)				
Biostar 3	3,0 m	3,0 m	2,20 m	1,80 m	3,0 m	810 kg	KAT II	picture 2
Biostar 3 seed	3,0 m	3,0 m	2,20 m	1,80 m	3,0 m	1200 kg	KAT II	picture 2
Biostar 6	6,2 m	3,0 m	3,1 m	1,80 m	6,2 m	1700 kg	KAT III	picture 2
Biostar 6 seed	6,2 m	3,0 m	3,1 m	1,80 m	6,2 m	2000 kg	KAT III	picture 2
Biostar 8	7,8 m	3,0 m	3,9 m	1,80 m	7,8 m	1890 kg	KAT III	picture 2
Biostar 8 seed	7,8 m	3,0 m	3,9 m	1,80 m	7,8 m	2190 kg	KAT III	picture 2
Biostar 9	9,1 m	3,0 m	3,85 m	1,6 m	7,1 m	2210 kg	KAT III	picture 1
Biostar 9 seed	9,1 m	3,0 m	3,85 m	1,7 m	7,1 m	2510 kg	KAT III	picture 1
Biostar 10	10,1 m	3,0 m	3,85 m	1,6 m	7,1 m	2600 kg	KAT III	picture 1
Biostar 10 seed	10,1 m	3,0 m	3,85 m	1,7 m	7,1 m	3000 kg	KAT III	picture 1
Biostar 12	12,1 m	3,0 m	3,85 m	1,6 m	7,1 m	2850 kg	KAT III	picture 1
Biostar 12 seed	12,1 m	3,0 m	3,85 m	1,7 m	7,1 m	3250 kg	KAT III	picture 1
Biostar 14	14 m	3,0 m	3,90 m	1,8 m	7,8 m	3580 kg	KAT III	picture 2
Biostar 14 seed	14 m	3,0 m	3,90 m	1,8 m	7,8 m	3980 kg	KAT III	picture 2
Biostar 15	15,1 m	3,0 m	3,90 m	2,26 m	7,8 m	3980 kg	KAT III	picture 2

Picture 1

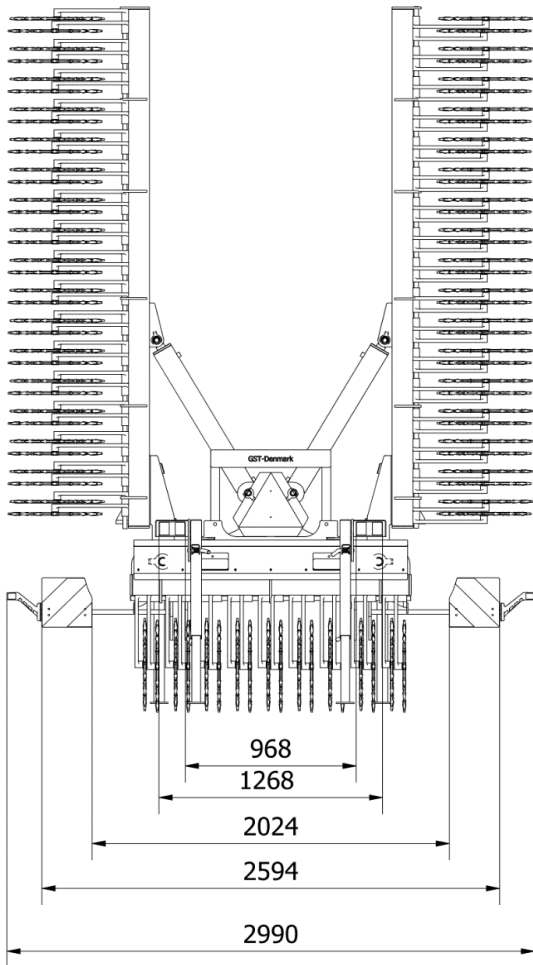

Picture 1

